

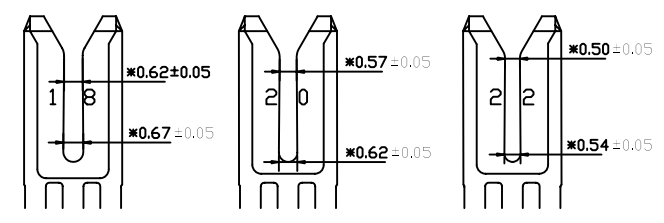




REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A				

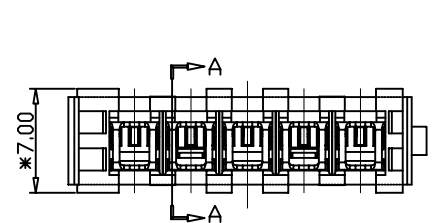





<A型>18#线端子 <B型>20#线端子 <C型>22#线端子

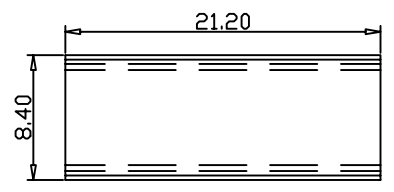


SECTION: (C-C)

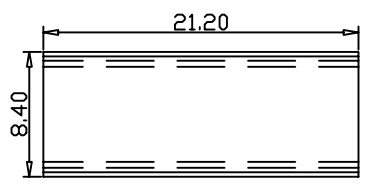



SECTION: (B-B)

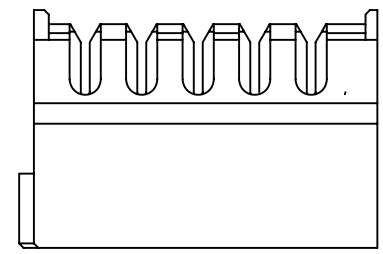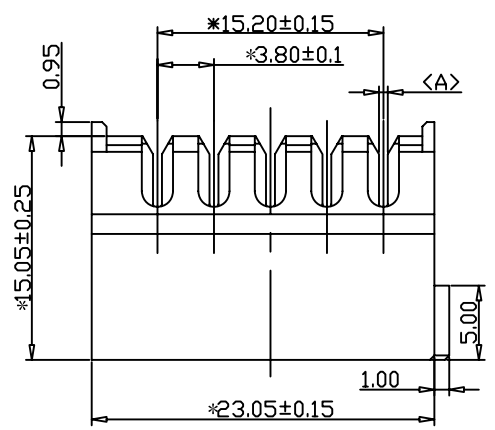

NOTES:
 CURRENT RATING:1.5A AC/DC.
 VOLTAGE RATING:15V AC/DC
 TEMPERATURE RANGE:-25°C~+85°C.
 CONTACT RESISTANCE:20MΩ Max.
 INSULATION RESISTANCE:1000MΩ Min.
 WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 WATRLAL:PBT+15%GF.U.L94V-0.

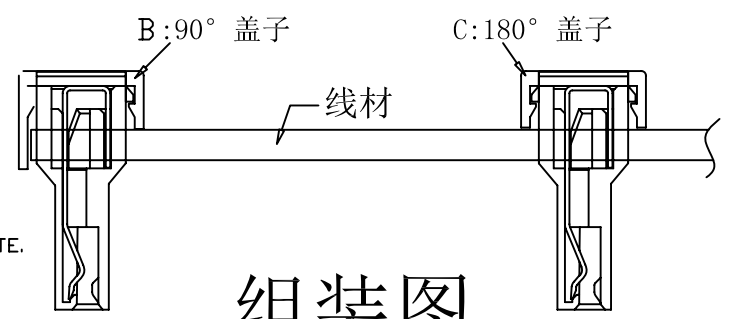

组装图

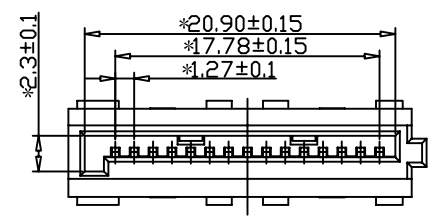

配合尺寸图

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO:	DRAW NAME:
DESIGN: 陈雪峰	2017.06.03	A3801HI-05P	SATA1.25mm pitch刺破式
CHECK: 杨 焯		REV:A/1	SCALE:1:1
REVIEW:		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X*	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/